




The Venue Main Room

PA Specification

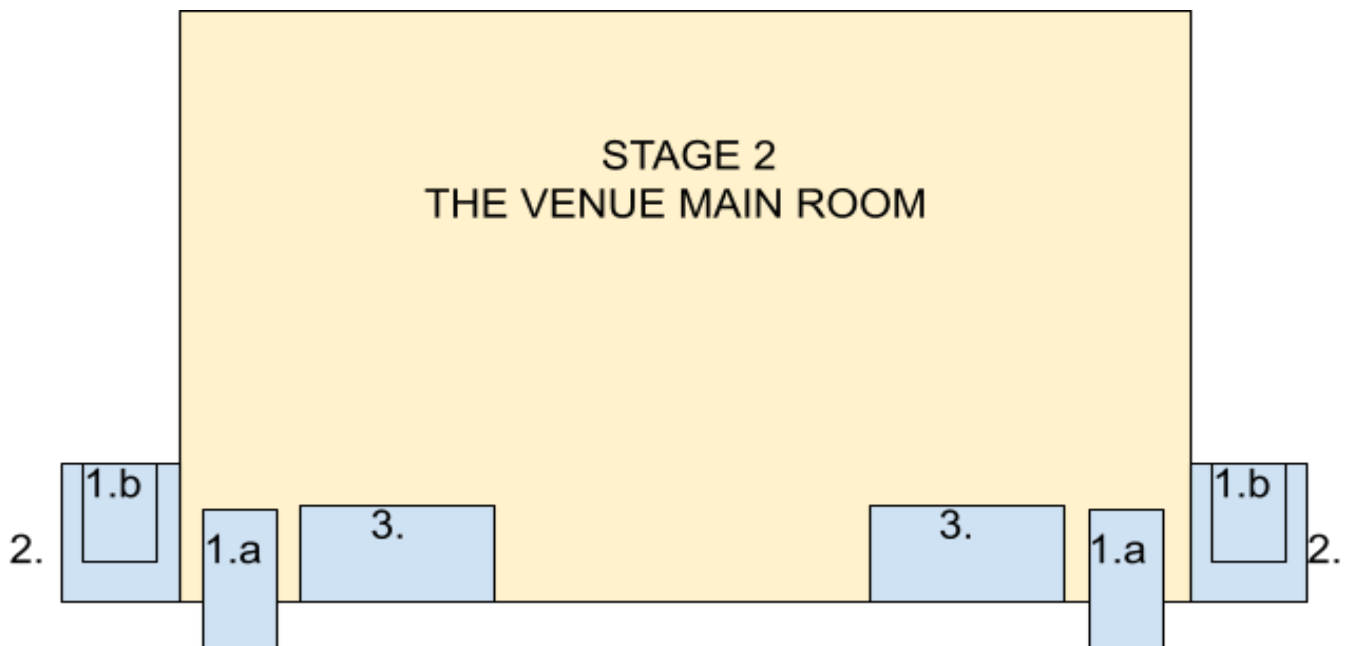

1. (a) EV DML 1152 DeltaMax - 8 Ohm / 50 Hz - 20000 Hz 475W RMS
1. (b) EV DML 1152 DeltaMax - 8 Ohm / 50 Hz - 20000 Hz 475W RMS
2. Fane Colossus Double Sub - 8 Ohm / 35 Hz - 2500 Hz 2000W RMS
3. JBL MRX500 Double Sub - 8 Ohm / 33 Hz - 600 Hz 2500W RMS

- Tops No. 1.(a) are fixed/mounted on the ceiling and facing the audience.
- Tops No. 1.(b) are set on the poles together with subs No. 2.
- Subs No. 2. are set on each side of the staging.
- Subs No. 3. are built into the stage.

Amp rack consist 3-way crossover and 4 amps with total output power of 8000W